
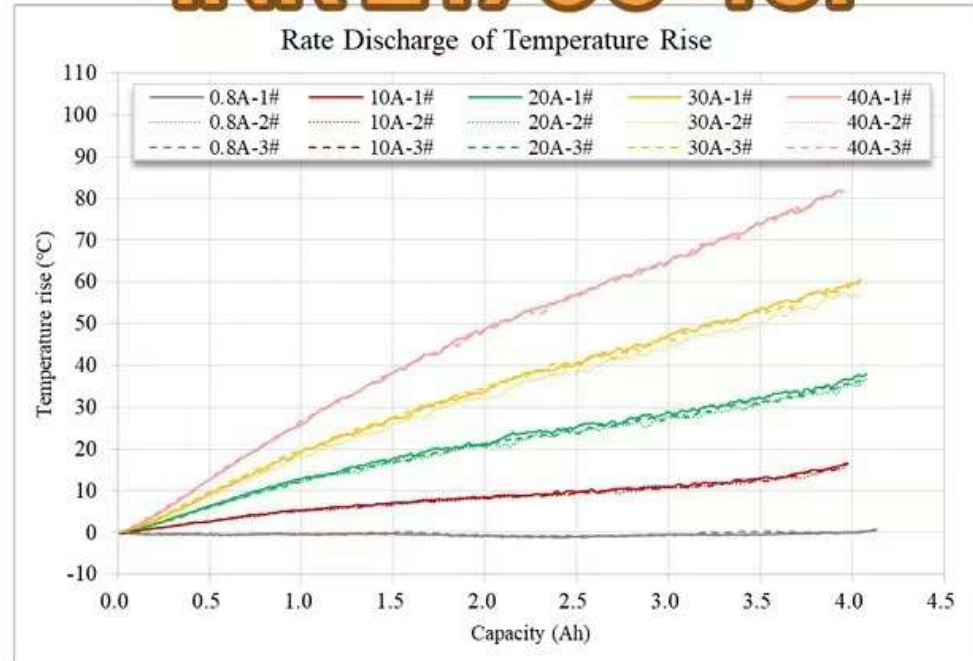


2. Electrical Performance -- Rate Discharge

- At $25 \pm 2^\circ\text{C}$, discharge by CC=0.8A to 2.5V. Rest for 10min. Then charge by CC=6A and CV=4.2V, 0.1A cut off. Rest for 10min.
- At $25 \pm 2^\circ\text{C}$, discharge by 0.8A/10A/20A/30A/40A to 2.5V. Rest for 30min.

INR 21700 40P

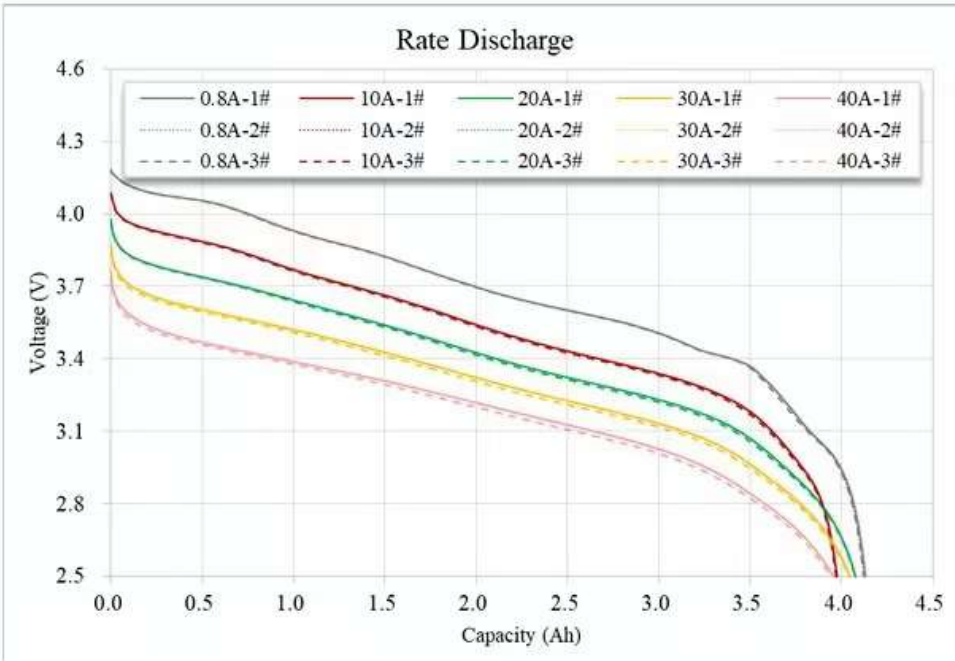

Capacity (%)	0.8A	10A	20A	30A	40A
1	103.8	100.0	102.5	101.8	99.5
2	103.8	100.0	102.5	101.8	99.5
3	103.8	100.0	102.6	101.8	99.3
Avg.	103.8	100.0	102.5	101.8	99.4
Spec	≥ 100	100	≥ 95	≥ 93	≥ 90